

# Dorus Hot Melt Adhesive KS 224/2




## EVA HOTMELT ADHESIVE FOR EDGE BANDING

### CHARACTERISTICS

- Low viscosity
- Low application temperature
- Fast melting
- Very good wetting
- High glue mileage
- Specifically designed for manually operated edgebanders.
- Adhesive can be applied directly onto the edgebanding.

### RECOMMENDED APPLICATIONS:

PVC. ABS\*. VENEER. POLYESTER. MELAMINE. SOLID WOOD

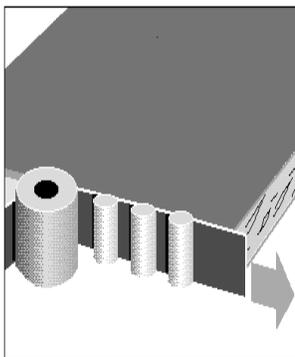

### TECHNICAL DATA:

Viscosity - (Brookfield) at 200°C : 10,000 mPas  
Softening Point : 85°C  
Heat Resistance : 75°C

### DIRECTIONS FOR APPLICATION:

Processing Temperature :  
• Application roller : 120-140°C  
• Melting container : 120-140°C  
Feed Speed : 30 ft./min.

**STOCK COLORS AVAILABLE:** NATURAL

**PACKAGING:** 55 LB. SACKS

### SAFETY DATA:

Serious burns can result from contact with molten hot adhesives. Hot Melt vapors can irritate respiratory organs. Adequate ventilation should be provided.

### STORAGE:

Dorus Hot Melt is to be kept dry and cool and may be stored for at least 1 year.

*Statements made are based on our experience and tests. However, recommendations and suggestions are made without guarantee since the conditions of use are beyond our control. Please test and establish for yourself our product's suitability for your particular purposes.*

*\*Conditionally recommended applications: Suggest testing on specific application to determine suitability.*

Dorus is the registered trademark of Dorus Klebtechnik GmbH + Co KG.

7566 Bath Road, Mississauga, Ontario L4T 1L2  
350 West Armory Drive, South Holland, IL 60473

800-461-0061 or 905-673-5156  
800-426-6362 or 905-673-5156

FAX: 905-673-9372  
FAX: 905-673-9372